■ Typical application 典型应用

- Passenger car power supply system
  乘用车电源系统
- Energy storage system of construction machinery
  工程机械储能系统
- Industrial standby power supply
  工业备用电源
- AGV on-board power supply
  AGV 车载电源
- Microgrid energy storage
  微网储能




Concept product image

Item 项目	Characteristics 特性		
Rated Voltage 额定电压	2.7V		
Operating Temperature Rang 工作温度范围	-40~+65℃		
Surge Voltage 浪涌电压	2.85V		
Capacitance Range 容量范围	800~1200F		
Capacitance Tolerance 容差范围 (25℃)	Q: -10~+30%, I: 0~+10%		
Temperature Characteristics 温度特性	The specifications shall be met at category temperature of 65℃ 在 65℃时应满足的规范	Capacitance change 容量变化	Within 10% of the initial value at 25℃ 在 25℃时初始值的 10% 以内
		ESR_{AC} change 交流内阻变化	Not more than the specified value 不超过规定值
	The specifications shall be met at category temperature of -40℃ 在 -40 ℃时应满足的规范	Capacitance change 容量变化	Within 30% of the initial value at 25℃ 在 25℃时初始值的 30% 以内
		ESR_{AC} change 交流内阻变化	Not more than 200% of the specified value 不超过 2 倍规定值
High Temperature Loaded 高温负荷	The specifications shall be met after rated voltage applied at 65℃ for 1500hours 在 65℃时，以额定电压恒压 1500h 后，应满足的规范	Capacitance change 容量变化	Within 30% of the initial value 在初始值的 30% 以内
		ESR_{AC} change 交流内阻变化	Not more than 200% of the specified value 不超过 2 倍规定值
High Temperature Storage 高温存储	The specifications shall be met after storage at 70℃ for 1000 hours 在 70℃时，不加电压储存 1000h 后，应满足的规范	Capacitance change 容量变化	Within 30% of the initial value 在初始值的 30% 以内
		ESR_{AC} change 交流内阻变化	Not more than 200% of the specified value 不超过 2 倍规定值
Cycle Life 循环寿命	The specifications shall be met after 500,000 cycles at 25 ℃ , cycle of charge/discharge from V_R to $1/2V_R$ 在 25 ℃ 时，V_R ~ $1/2V_R$ 充放电循环 500,000 次后，应满足的规范	Capacitance change 容量变化	Within 30% of the initial value 在初始值的 30% 以内
		ESR_{AC} change 交流内阻变化	Not more than 200% of the specified value 不超过 2 倍规定值

EDLC

Dimensions 尺寸

mm

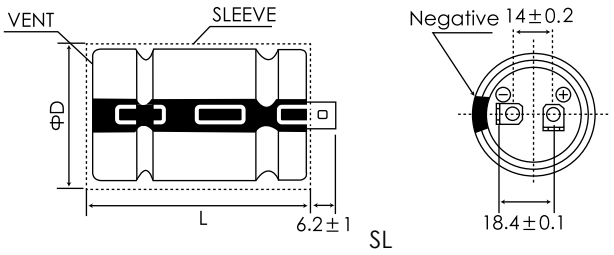

SL

Standard Ratings for S27H Series

U_R (Surge Voltage) Code 额定电压 (浪涌电压) 代码	Rated Cap. 25℃ 额定容量 25℃ (*)	Impedance 内阻		Peak Current 峰值电流 Δt=1s	Rated Current 额定电流	Leakage Current 漏电流 (72hrs)	Size 尺寸 ΦD x L	Weight 重量
		ESR_{DC} 直流内阻	ESR_{AC} 交流内阻 (1KHz)					
(V)	(F)	(mΩ)	(mΩ)	(A)	(A)	(mA)	(mm)	(g)
2.7 (2.85) 2R7	800	2.5	2.0	360	24	1.5	40×70	113
	900	2.5	2.0	374	27	2.0	40×75	125
	1000	2.5	2.0	386	30	2.5	40×90	145
	1200	2.3	1.8	431	36	2.5	40×105	163

EDLC